


Marine Battery Charger Traditional

Fully automatic battery chargers.
 They can stay connected 24 hours on 24
 without overloading the batteries.
 Particularly suitable for marine
 use because they are made of
 materials resistant to corrosion.



MODEL		MBC1512	MBC2512D	MBC4012D
Max. Output Current	A	15	25	40
Charge Voltage Boost	Vdc	14.3	14.3	14.3
Charging Characteristics		Automatic/Manual	Automatic/Manual	Automatic/Manual
Outputs	No.	1	2	2
Voltage Supply	Vac	230 ±10%	230 ±10%	230 ±10%
Max. Absorption (230V)	A	1	2	3
Working Temperature		-10 ÷ +50 °C	-10 ÷ +50 °C	-10 ÷ +50 °C
Dimensions (LxWxH)	mm	153 x 250 x 93	170 x 210 x 135	220 x 300 x 150
Weight	Kg	2.5	6	12
Aluminum housing, epoxy paint.				

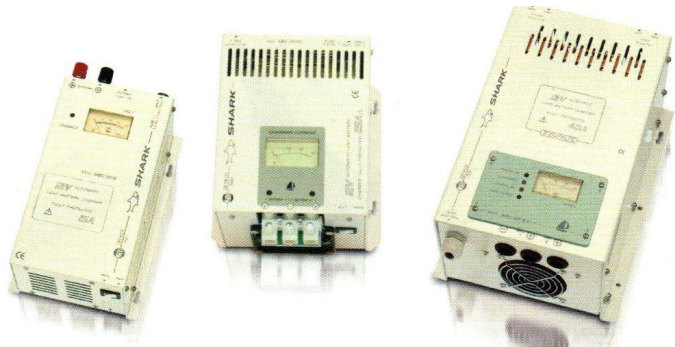

[DOWNLOAD PDF](#)